


## DATA SHEET

## THE TUNBRIDGE WELLS Brassware Co.

## **Bewl Round Thermostatic Shower Valve & Kit**

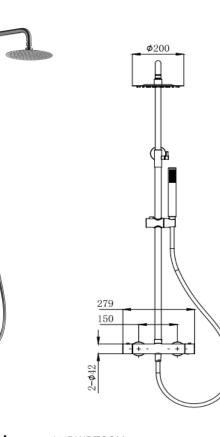

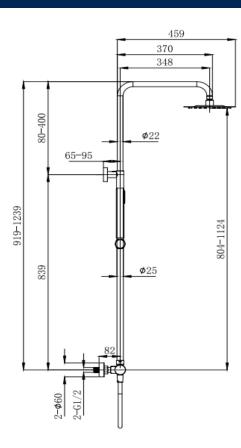



167.BWRTSGM					
Valve: High Performance Polyamide (PPA) Body & SS201 Stainless steel Casing; Stainless steel Riser rail & Base plates; ABS Handles					
Gunmetal Grey					
Min. 0.5 bar, Max. 6.0 bar					
Suitable for all plumbing systems, Hot and Cold water pressure preferably balanced, max. supply pressure differential require ment no greater than 5:1					
Complies with BS EN 1111					
Thermostatic cartridge					
Easy Fitting water inlet connector; Brass G1/2" BSP Male bottom outlet & G3/4" BSP Male upper outlet connection					

Certification:	WRAS approved and certified
Packaging:	93 x 43.5 x 36cm / carton (4 boxes), Dimension: 91 x 42 x 8.5cm / box
Guarantee:	10 years against manufacturing faults (excluding serviceable parts)
Additional Information:	<ol> <li>Temperature: Pre-set 38°C, with push button override to 48°C</li> <li>Automatic shut off in the event of hot or cold water supply failure</li> <li>COOL TOUCH Bar Valve technology</li> <li>Ultra Slim Shower head : Gunmetal Grey, Ø200mm</li> <li>Shower handset : Gunmetal Grey, ABS, single mode</li> <li>Handset holder : Gunmetal Grey, ABS</li> <li>Shower hose : Gunmetal Grey, double interlock, 1.5m, Large Ø11mm bore</li> <li>Riser rail : Gunmetal Grey, Stainless steel, adjustable height</li> </ol>

## Flow Rates (Litres per minute)

(	,									
System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
Handset	3.1	-	5.8	7.8	11.4	-	16.5	20.2	23.3	26.1
Showerhead	2.8	-	5.6	7.7	11.3	-	16.4	20.1	23.4	26.1

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.