


Cortina Contract




Technical sheet

CE






PIPES: 13




PIPES: 18

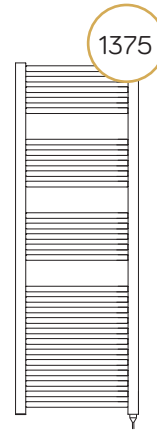


PIPES: 27

Description	Straight
Material	Carbon steel
Pipes - Ø	22x0,9
Collectors - mm	40x30x1,5 - «D» shape
Wall fixings	3
Max temperature	75 °C
Paint	Epoxy polyester powder
Packaging	Cardboard box, styrofoam and carton protections
Protection rate	IP64
Electrical insulation	Class 1
Power source	230V - 50Hz
Heating element protection system	Overtemperature cut-out / Thermalfuse
Wire	Straight with shuko plug. Approx. length 1000 mm ca.
Standard equipment	1 kit wall fixing brackets

Wall distance



Min.	Max
85	95

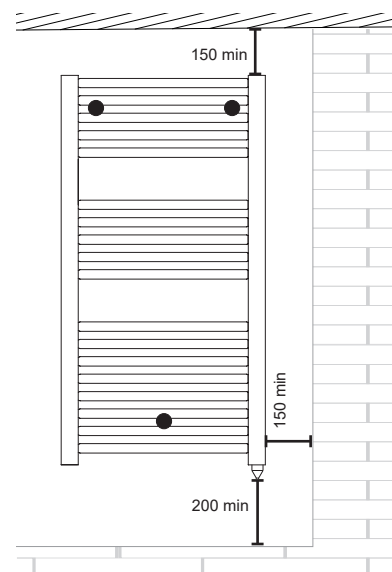

Chrome - straight

Code	Height mm	Width mm	Weight kg	Heating element watt	Heating element kcal/h	Heating element btu	Overtemperature °C	Thermalfuse °C
383335	720	400	7,4	200	172	683	80	152
383336	920	480	9,1	300	258	1024	90	152
383337	1375	480	14,4	500	430	1706	90	152

Anthracite VOV12 - straight

Code	Height mm	Width mm	Weight kg	Heating element watt	Heating element kcal/h	Heating element btu	Overtemperature °C	Thermalfuse °C
384997	720	400	7,4	300	258	1024	90	152
384998	920	480	9,1	500	430	1706	90	152
384999	1375	480	14,4	750	649	2559	90	152

Matt Black RAL9005 - straight

Code	Height mm	Width mm	Weight kg	Heating element watt	Heating element kcal/h	Heating element btu	Overtemperature °C	Thermalfuse °C
380142	720	400	7,4	300	258	1024	90	152
380143	920	480	9,1	500	430	1706	90	152
380144	1375	480	14,4	750	649	2559	90	152

White RAL9016 - straight

Code	Height mm	Width mm	Weight kg	Heating element watt	Heating element kcal/h	Heating element btu	Overtemperature °C	Thermalfuse °C
384994	720	400	7,4	300	258	1024	90	152
384995	920	480	9,1	500	430	1706	90	152
384996	1375	480	14,4	750	649	2559	90	152